

60 lb. - 142 lb. Rail

AL-200-S Screw-Jack Rail Bender



25 Ton Bender for conventional strength rail.
Single hook bender frame. Safety chain secures 25-ton screw jack to frame. Jack piston has 5" scale built-in.

4021-02 Weight: 184 lbs.

AL-200-H Hydraulic Rail Bender



30 Ton Bender for conventional strength rail.
Single hook bender frame. Safety chain secures ram/pump unit to frame.


4021-01 Weight: 184 lbs.

25 lb. - 85 lb. Rail

Curve mine rail and make other rail repairs.
V-shaped bender frame available with 25-ton hydraulic ram-pump or 50-ton ram with remote pump.

Spring return retracts ram when relief valve is turned.

Part No.	Ram Size	Rail Size	Weight
4021-06	25 tons	60-70#	138 lbs.
4021-07	25 tons	25-60#	195 lbs.
4021-09	50 tons	60-85#	170 lbs.

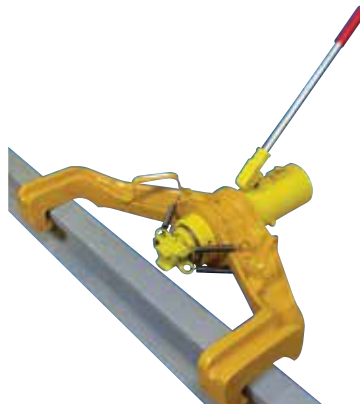

4021-06 and 4021-07



4021-09

Rail Thermometer (Fahrenheit)



Features 4-magnet base.

4124-18 Weight 1 lb.

Rope Pull Aparts



1" diameter fiberglass rope. Soak in kerosene and use to heat rail head prior to welding or bending.

Sold in 125 ft. lengths.

4124-17 Weight 23 lbs.

"FIRE SNAKE" Gel-Based Pull Apart



Heats rail to draw joints together and promote rail bonding. Flammable gel in protective casing burns hotter (360°F) and longer (20 min.) than rope pull-aparts. Sold in lots of four 10 ft. sections in metal safety can. Special flammable shipping regulations apply. Use a flare holder to ignite.

4123-130 Weight 15 lbs. per can of 4

Rail Tongs



For standard T-rail
80-155 lbs./yd.
Lifts 39 ft. rail sections
Load capacity: 6000 lbs.
Lift only — do not drag.

4123-71 Weight 60 lbs.


Switch Frog Crane Tongs



Capacity 8 tons.
Fits all standard frogs.
(Not for self-guarded frogs.)

4123-125 Weight 54 lbs.

Rail Tugger



Self-locking wedge grabs rail for
easy pulling and positioning of
rail lengths. Handles rails from
100 to 140 lbs./yd.

4123-72 Weight 40 lbs.

Track Jacks



4123-63

4123-64

Mechanical track jack provides low handle effort. Can be used for lifting (vertical) or pushing (horizontal) applications. Forged and heat treated components for strength and long service life.

Quick-trip mechanism allows load to be instantly dropped.

Accepts any 1-1/2" square lining bar.

4123-63 Lifting Capacity: 15-ton Weight: 30 lbs.

4123-64 Lifting Capacity: 15-ton Weight: 50 lbs.

Rail Puller & Expander



Control expansion and contraction of jointed rail. Alloy steel, heat-treated. U-Bar fits rail web. 30 ton capacity. Weight 87 lbs.

4123-69 For 1" Bolts

4123-70 For 1-1/8" Bolts



		Jaw Opening			Jaw Opening	
1.	4123-15 Skidding Tongs	10 lbs.	21 ³ / ₄ "	6.	4123-85 Aluminum Tie Tong w/replaceable tips	9 lbs. 15 ¹ / ₂ "
2.	4123-14 Two-Man Rail Tong	19 lbs.	3 ³ / ₄ "	7.	4123-23 Two-Man Timber Tong	12 lbs. 15 ¹ / ₂ "
3.	4123-93 Timber Dragging Tongs	15 lbs.	20"	8.	4123-21 One-Man Tie Tongs	10 lbs. 15 ¹ / ₂ "
4.	4123-87 Tie Carrier (crane type)	37 lbs.	19"			
5.	4123-88 Timber Carrier (crane type)	51 lbs.	29"			