



# Track Clearance Marker


*for Flush Rail Track*

## Installation Guide

**#4015-146** for asphalt paving

**#4015-156** for concrete paving

Use to comply with FRA Rule 49 CFR 218.101

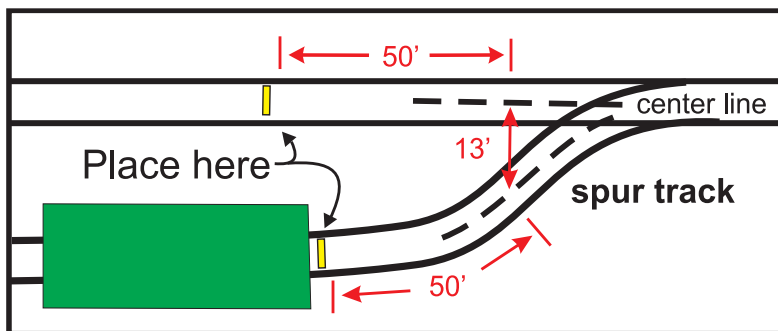

**Please consult with your local railroad  
when installing track clearance markers.**

Track clearance markers should be installed on both tracks converging on a switch.

Markers should be placed 50 ft from points measuring 13 ft on-center to the adjacent track.

In winter, brush away snow to keep the marker visible.

*Track Clearance Markers can also be used in dock areas and inside repair shops to delimit car parking positions.*



**ALDON®**  
Safety on Track Since 1904

3410 Sunset Ave | Waukegan, IL 60087  
847.623.8800 | e-rail@aldonco.com