



0553A

STD DWG

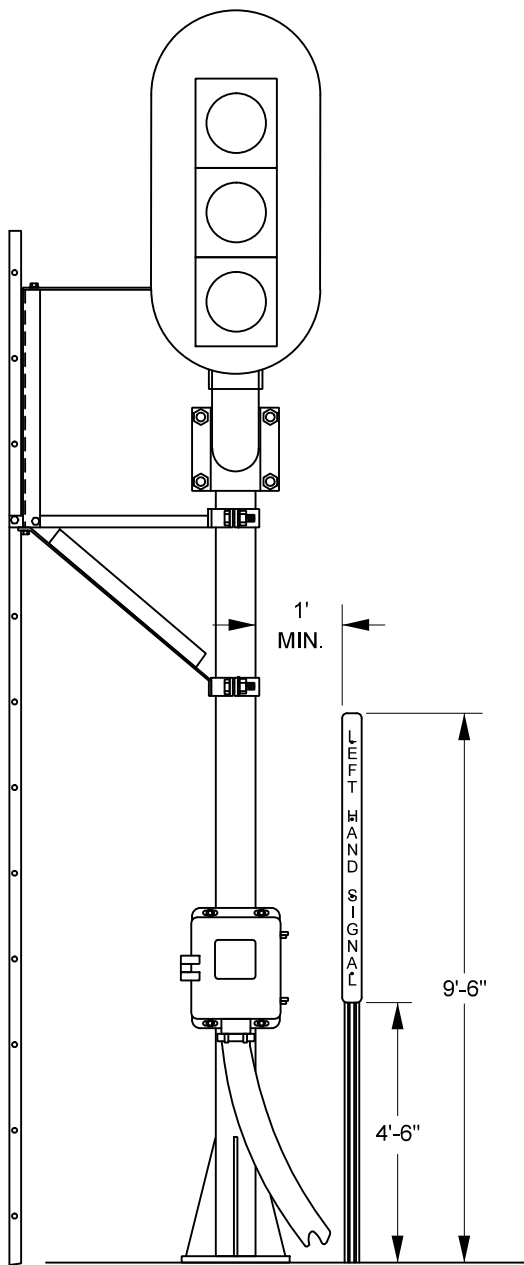

SIGN MOUNTING

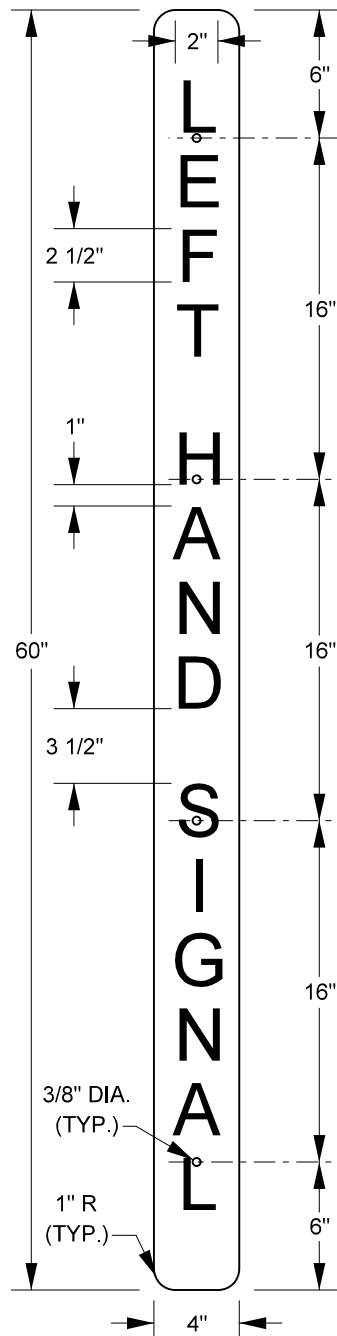

LEFT HAND SIGNAL SIGN

NOTES:

1. LEFT HAND SIGNAL SIGN TO BE USED IN HIGH DENSITY AREAS WHERE IT IS DIFFICULT TO DETERMINE A LEFT HAND SIGNAL.
2. SIGN TO BE 3M HIGH INTENSITY PRISMATIC (OR EQUIVALENT) REFLECTIVE BACKGROUND ON 0.08" ALUMINUM SHEETING.
3. SIGN WILL FACE IN THE SAME DIRECTION AS THE SIGNAL HEAD.
4. WRITE INSTALL DATE ON THE BACK OF THE SIGN.
5. SEE STANDARD DRAWING 0038 FOR STANDARD MINIMUM OPERATING CLEARANCES.

UNION PACIFIC RAILROAD
ENGINEERING STANDARDS

LEFT HAND
SIGNAL SIGN

ITEM NO.
559-1005



ADOPTED: SEP. 21, 2020
REVISED: OCT. 10, 2022
FILE NO.: 0553

STD DWG
0553A