


RECTANGULAR STOP SIGN

RAIL EQUIPMENT

NOTES:

1. RAIL EQUIPMENT STOP SIGN TO BE INSTALLED 200 FEET IN ADVANCE OF FIXED LOCATIONS (RAILROAD CROSSING, DRAW SPAN, YARD/INDUSTRY TRACK ROAD CROSSING, ETC.) WHERE ALL TRAINS ARE EXPECTED TO STOP. SIGN TO BE PLACED ON ENGINEER'S SIDE OF TRACK WITH NEAREST POINT OF SIGN TO BE A MINIMUM OF TEN FEET FROM THE GAGE SIDE OF THE NEAREST RAIL.
2. RAIL EQUIPMENT STOP SIGN NOT TO BE USED WHERE CROSSINGS, JUNCTIONS, OR DRAW SPANS ARE PROTECTED BY SIGNALS OR GATES.
3. 30" AND 36" VEHICULAR SIGNS LIMITED TO PLACEMENT AT PUBLIC ROAD INTERSECTIONS AND PUBLIC ROAD CROSSINGS AS INSTRUCTED BY THE PUBLIC ROADWAY AUTHORITY.
4. 24" VEHICULAR SIGN TO BE USED AT PRIVATE ROAD CROSSINGS, REFERENCE STD DWG 0521.
5. ALL SIGNS TO BE REVERSED SCREENED NO. 882 TRANSPARENT RED BACKGROUND AND 3990 SILVER 3M DIAMOND GRADE OR EQUIVALENT ON 0.080" 3105 SHEET ALUMINUM.
6. FOR LETTERING, SEE STD DWG 0501 FOR MOUNTING DETAILS, SEE STD DWG 0599

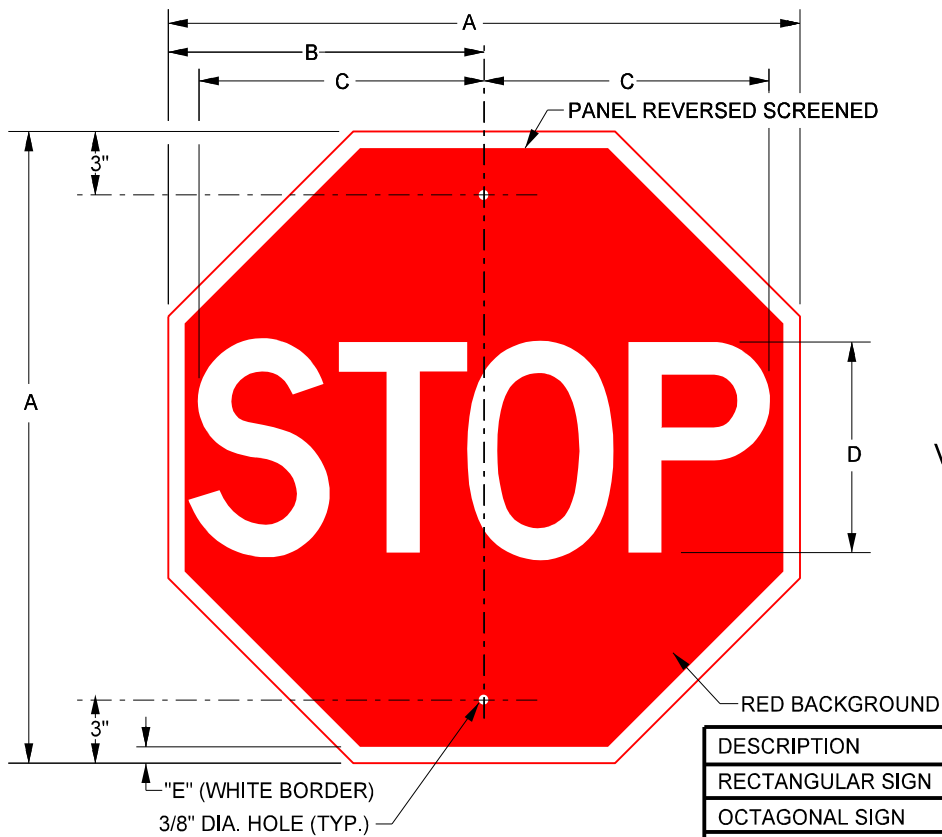

OCTAGONAL STOP SIGN

VEHICULAR

DESCRIPTION	ITEM NO.	A	B	C	D	E
RECTANGULAR SIGN	393-9060	24"	12"	11"	8"	16"
OCTAGONAL SIGN	393-5896	24"	12"	10"	8"	5/8"
OCTAGONAL SIGN	393-6100	30"	15"	12 1/2"	10"	3/4"
OCTAGONAL SIGN	393-6105	36"	18"	15"	12"	7/8"

UNION PACIFIC RAILROAD  
ENGINEERING STANDARDS

STOP SIGN



ADOPTED: SEP. 21, 2020  
REVISED:  
FILE NO.: 0536

STD DWG

0536

0536

STD DWG