


2" BLACK GOTHIC "D" NUMBERS  
USE STICKER TO  
ADD IN NUMBER

SILVER

3/8" DIA. HOLE (TYP.)

**STA SIGN**  
NON-STOCK ITEM

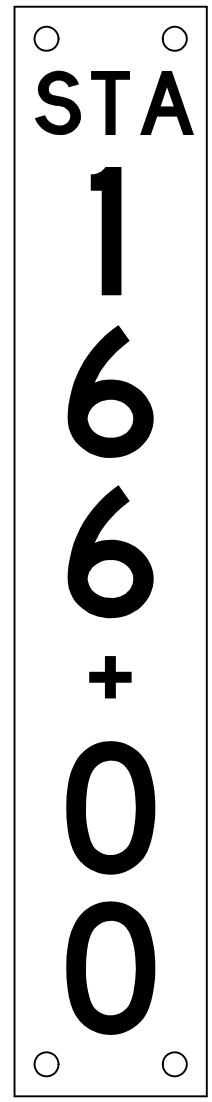

**SAMPLE SIGN**

**NOTES:**

1. TUNNEL STATION SIGN TO BE MOUNTED FLAT DIRECTLY TO THE TUNNEL WALL. ANCHOR SIGN WITH ROCK ANCHORS APPRX. 4 FT. TO 5 FT. ABOVE THE RAIL. A MINIMUM OF 2 ANCHORS SHOULD BE USED TO SECURE SIGN TO TUNNEL WALL.
2. INSTALL SIGNS AT 100 FT. INTERVALS STARTING AT THE TUNNEL PORTAL AT THE LOW MILE POST.
3. SIGN TO BE NO. 3870 SILVER 3M HIGH INTENSITY BACKGROUND ON 0.080" 3105 SHEET ALUMINUM.
4. "STA" LETTERS TO BE 1" HIGH BLACK (GOTHIC "D" STYLE).
5. STA NUMBER TO BE LEFT BLANK, AND APPLIED IN FIELD. APPLY NUMBER USING STICKER (STICKER PACK ITEM NO. 26352).

**UNION PACIFIC RAILROAD  
ENGINEERING STANDARDS**

**TUNNEL STATION SIGN**



ADOPTED: FEB. 4, 2022  
REVISED:  
FILE NO.: 0569

STD DWG  
**0569**

0569  
STD DWG