


# ALDON® SLIDING DERAIL

## Questionnaire


We need the following information to process your order

① Derail Direction


Please check the model you wish to buy.



Left throw  
#4114-10L



Right throw  
#4114-10R



Two-way  
#4114-11

② Track is  Straight  
 Curved

③ Rail is  Exposed to ties

Flush with pavement  
Please contact us if your rail is flush ...


④ Rail Size and Section

Stamped on web of rail at intervals. \_\_\_\_\_

⑤ Height of Rail Above Tie

**Include Tie Plate Thickness**  
Minimum Height for Sliding Derail is 5.5"


For more than one track, please fill out a separate form for each.

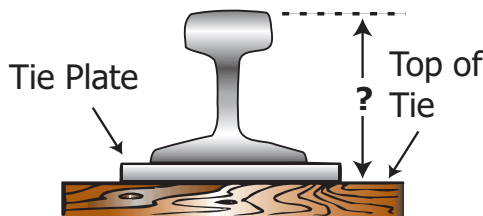


⑥ Derail Application

Please check the model you wish to buy.

Near Rail

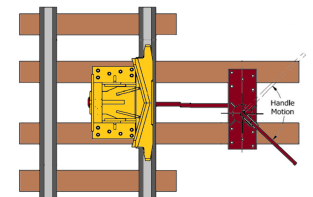

Far Rail

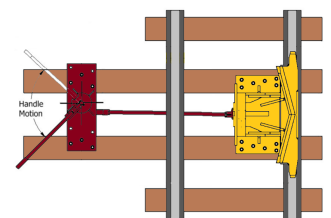

⑦ Crossties – Customer furnishes two 14 ft. wooden switch ties.  
(Sliding derails cannot be installed on resin, steel or concrete ties.)

Company \_\_\_\_\_

Your Name \_\_\_\_\_

Phone \_\_\_\_\_

Fax \_\_\_\_\_

Email \_\_\_\_\_

Date \_\_\_\_\_

PO \_\_\_\_\_

Order # \_\_\_\_\_

If you've already ordered

**This is a special order and cannot be returned.**

REV 11-4-25



**ALDON®**  
Safety on Track Since 1904

Aldon Company, Inc. | 3410 Sunset Avenue | Waukegan, Illinois 60087  
PH. 847.623.8800 | FX. 847.623.6139 | e-rail@aldonco.com | www.aldonco.com